

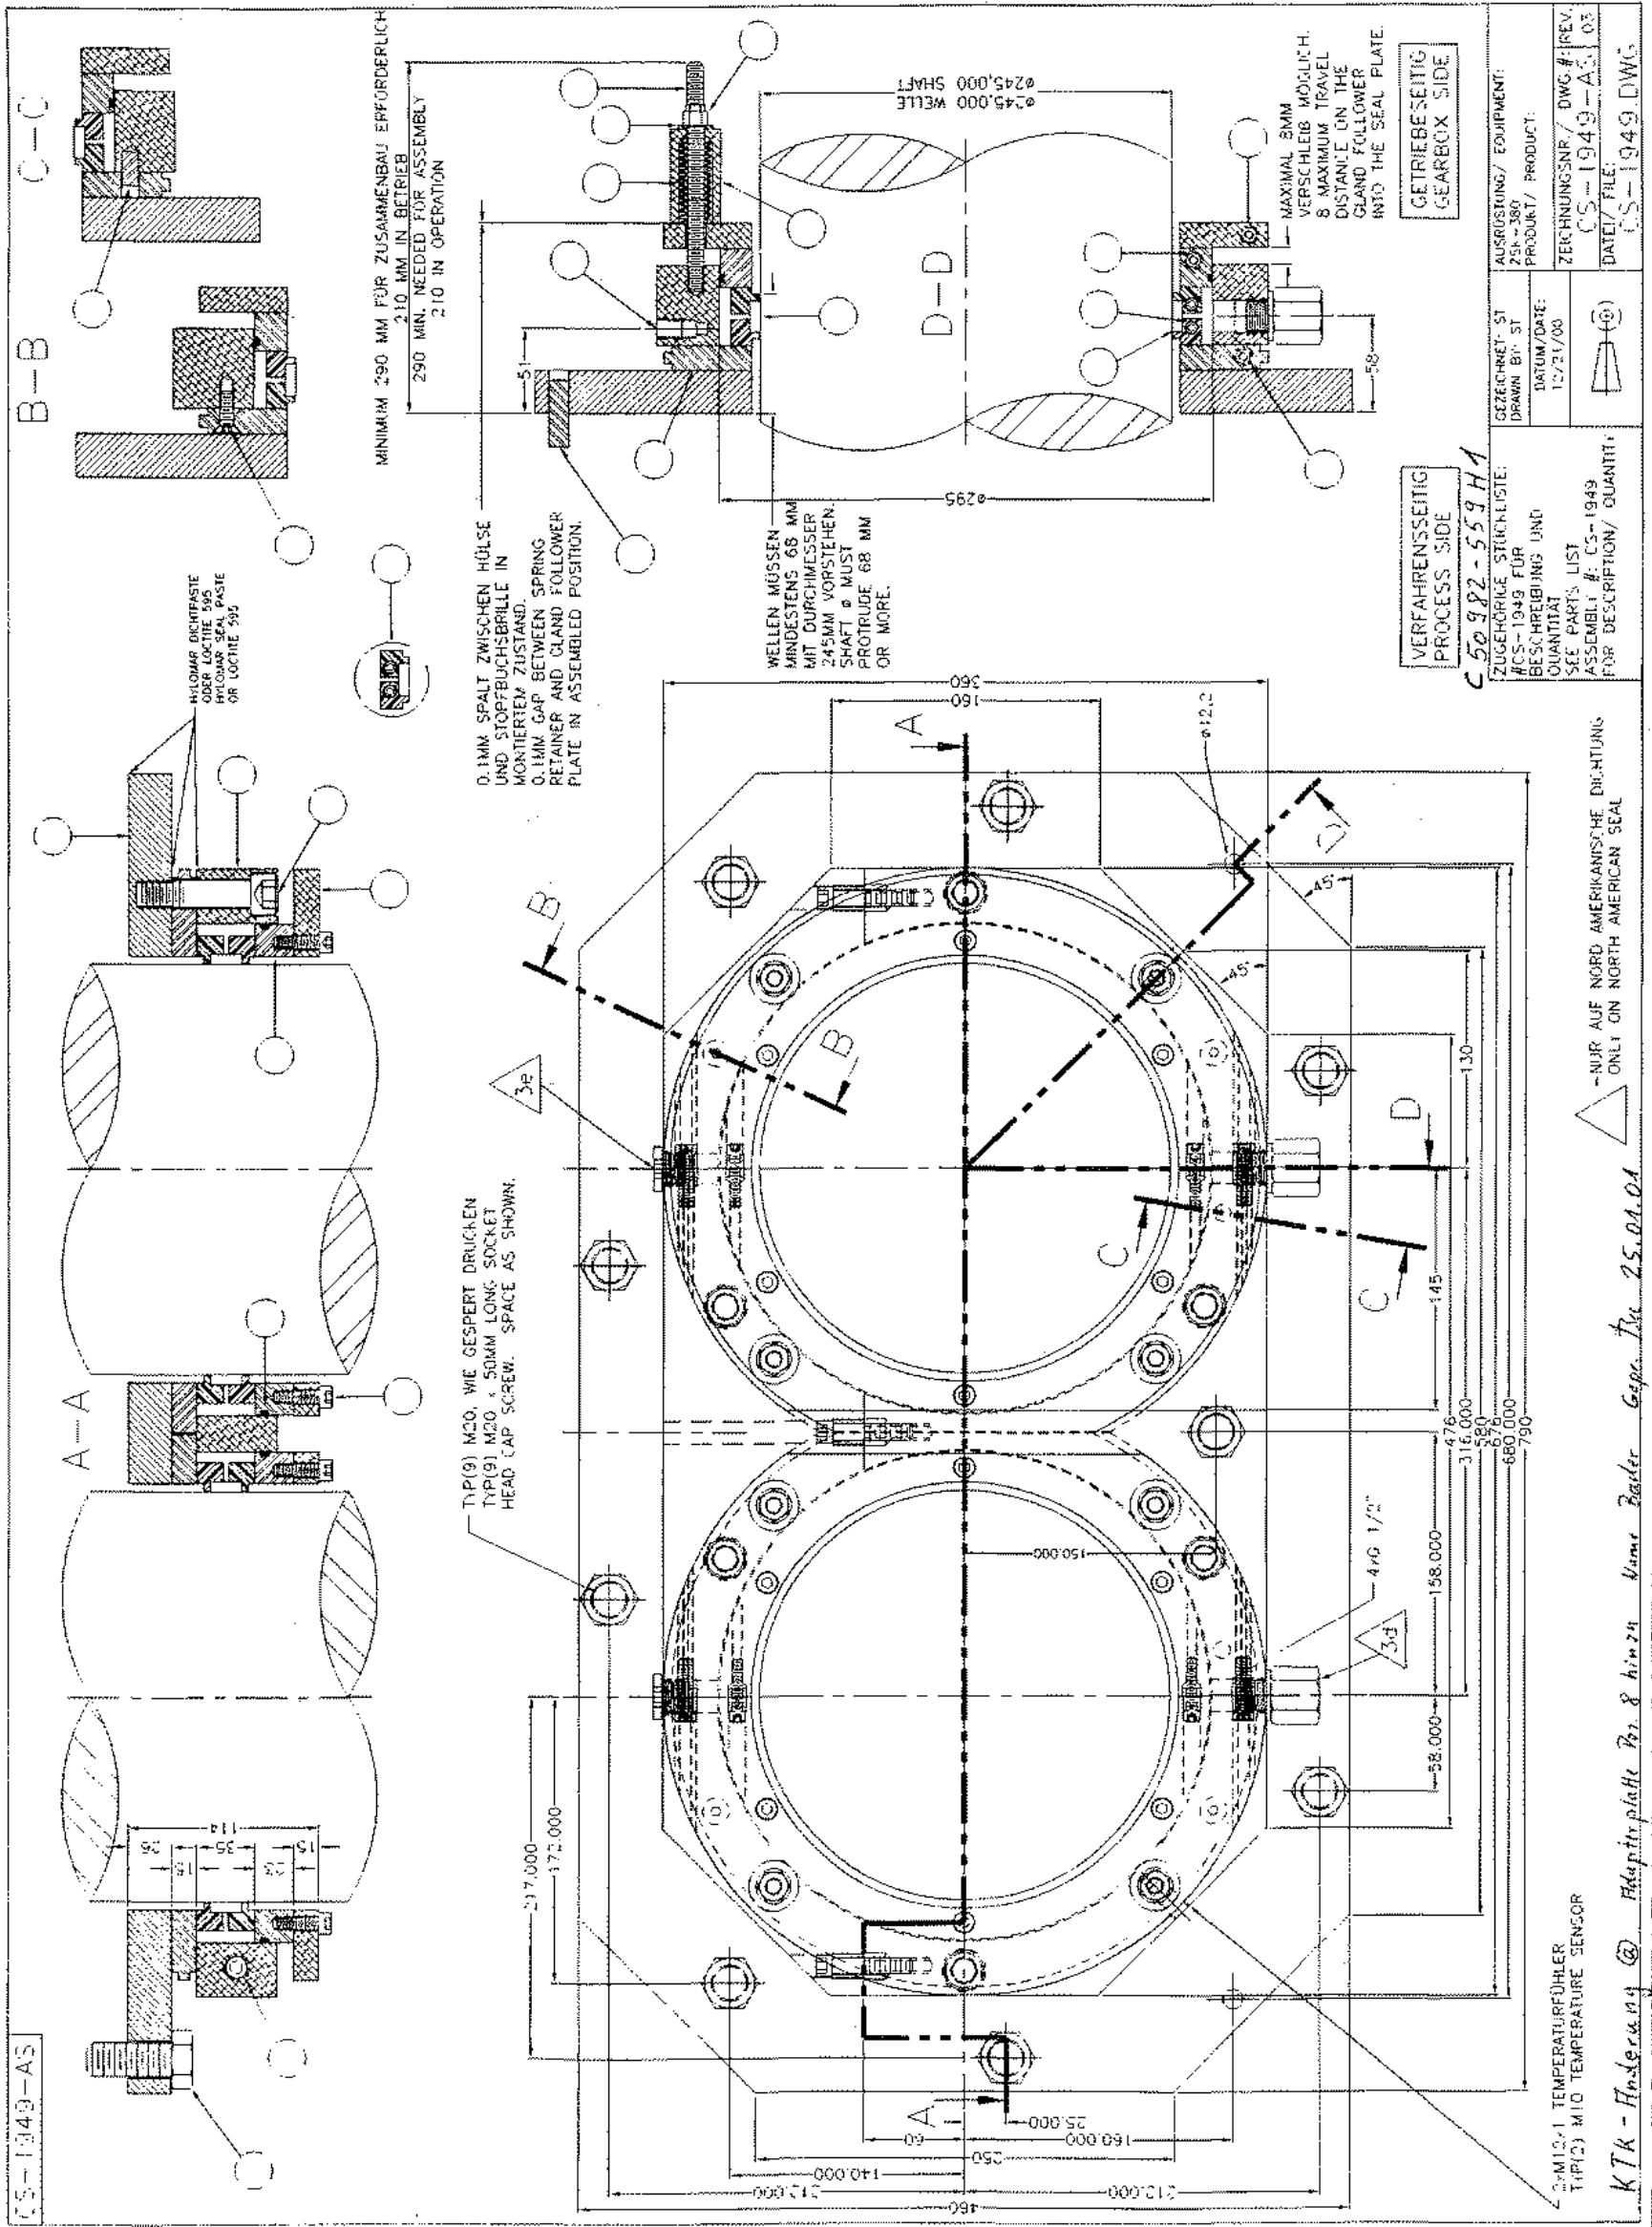
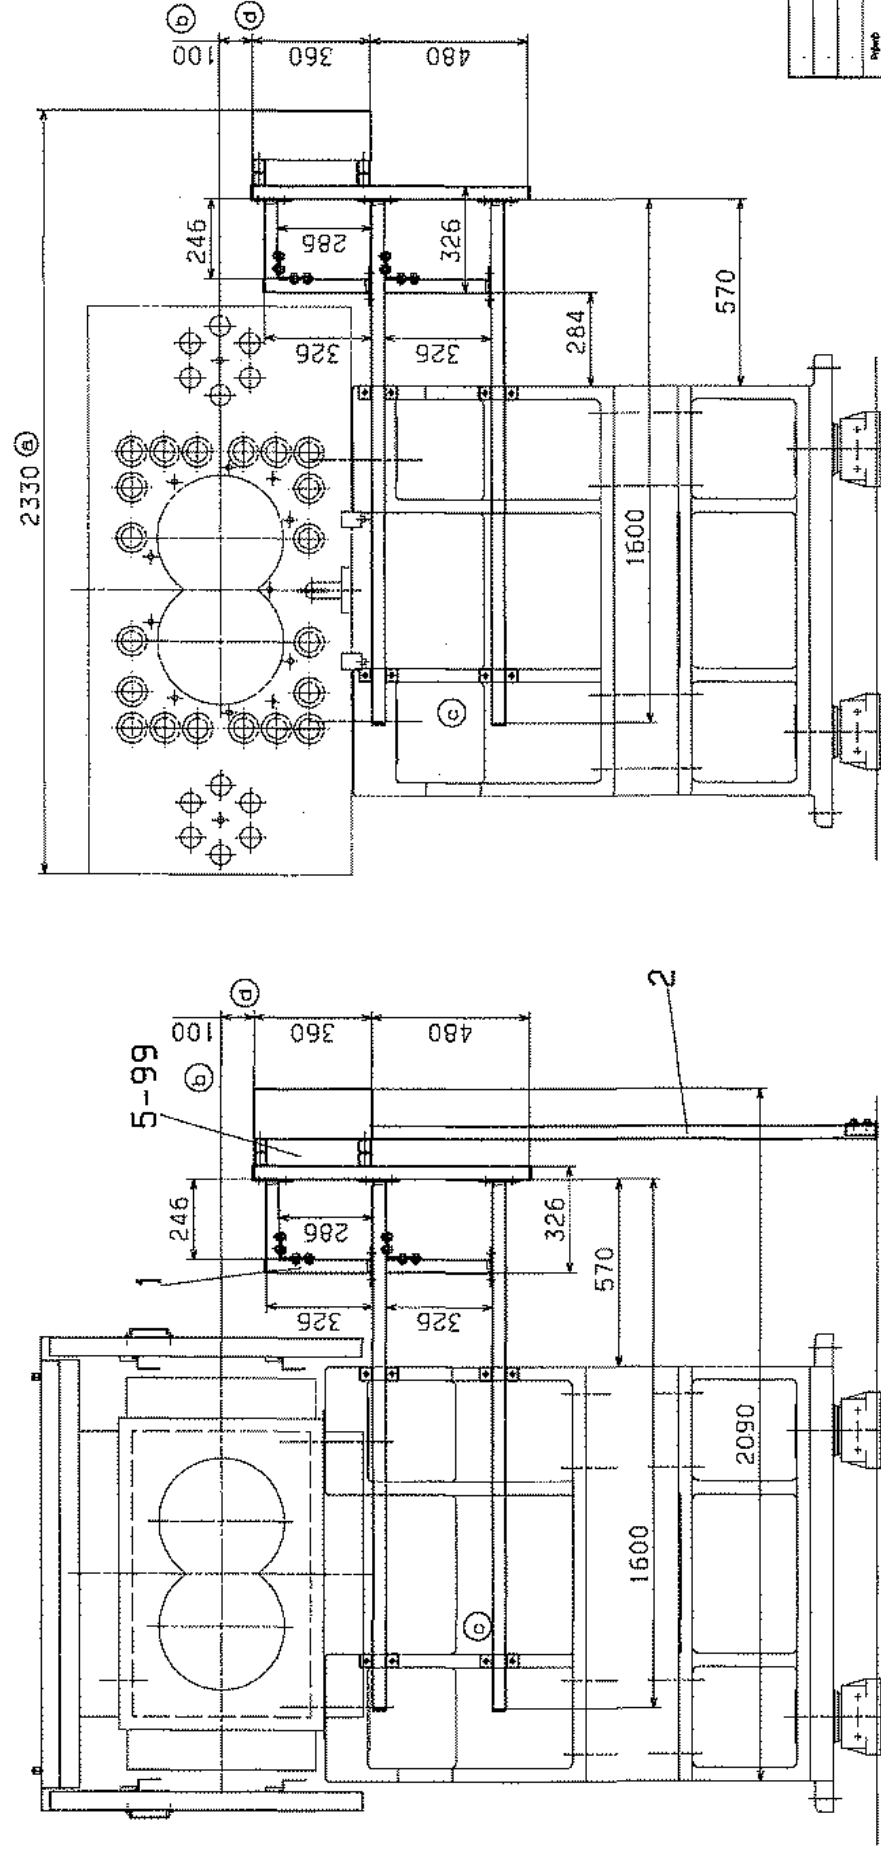


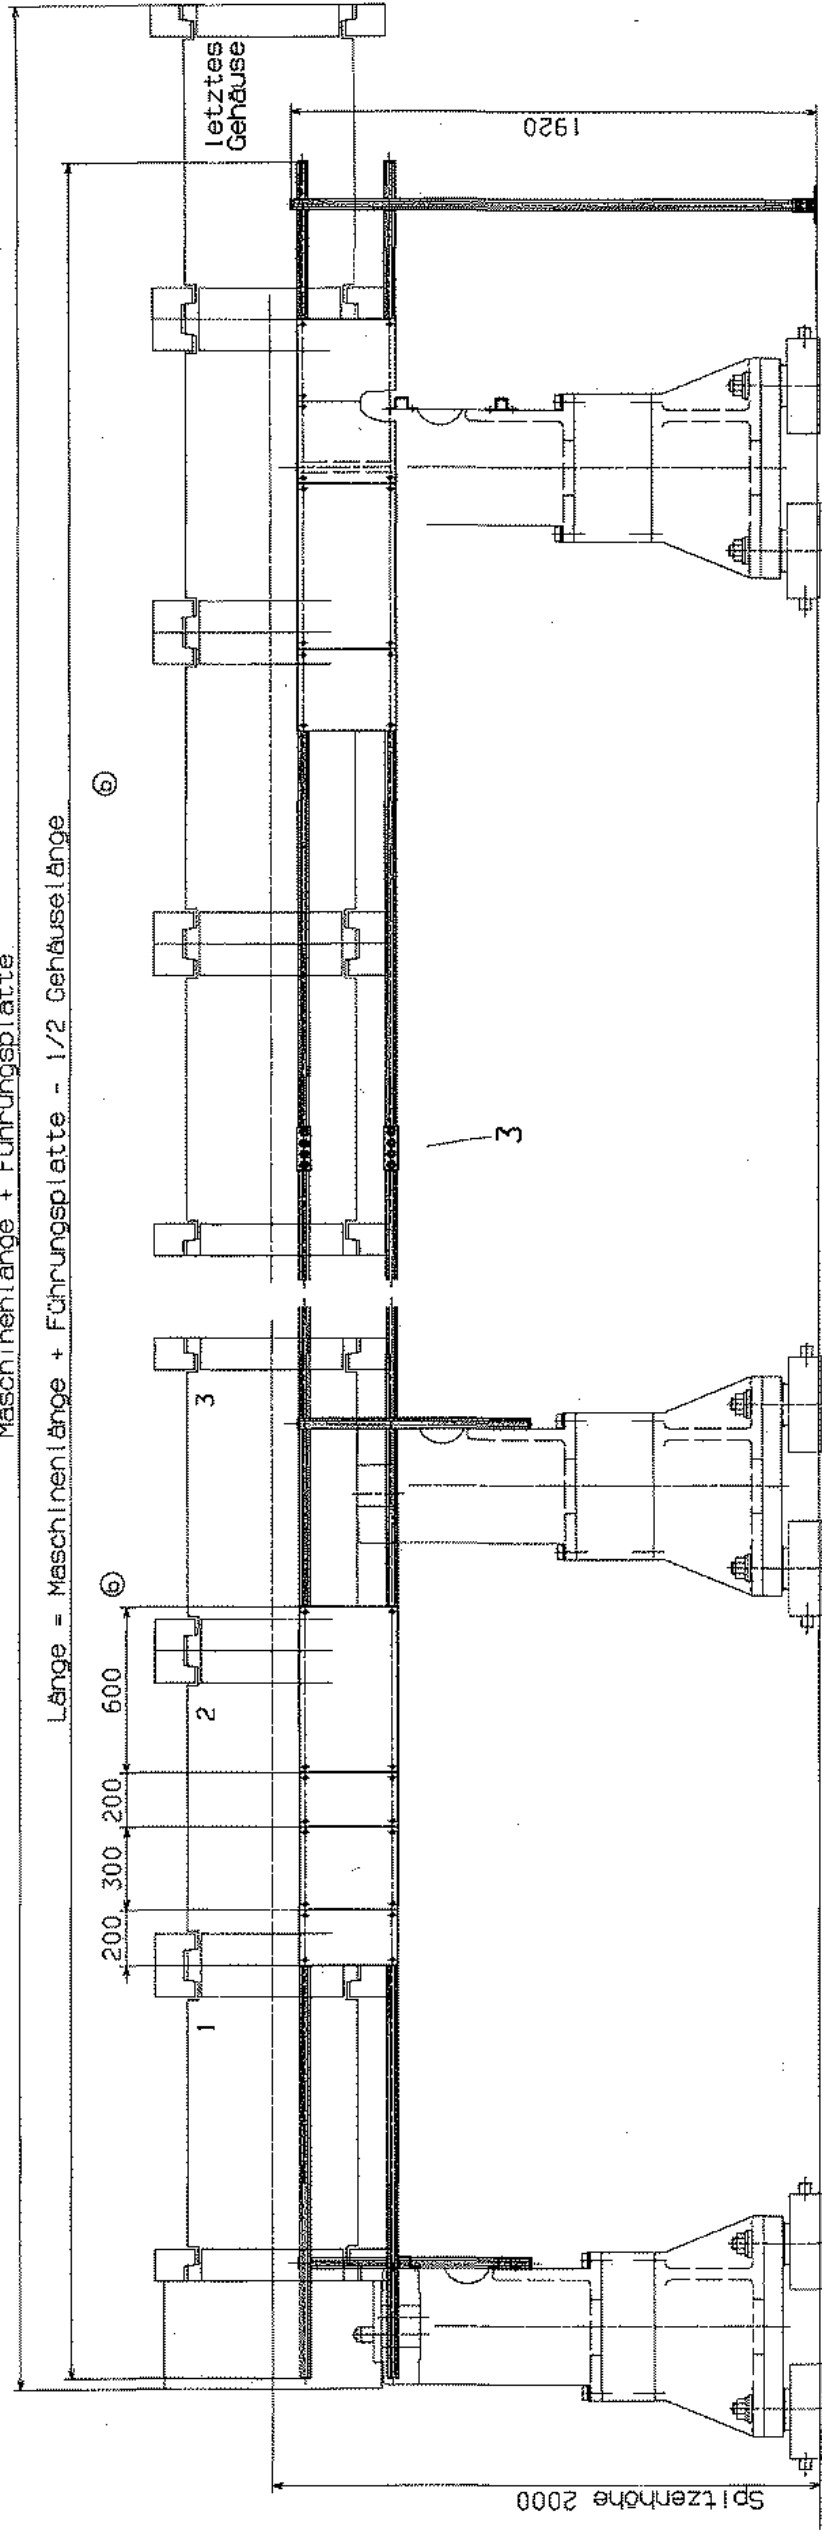

Maschinenlänge + Führungsplatte

[illegible]

4 screws M 30 have to be turned out before putting upper shell on screw shafts.
After putting upper shell on, turn in screws to protect screw shafts from slipping.

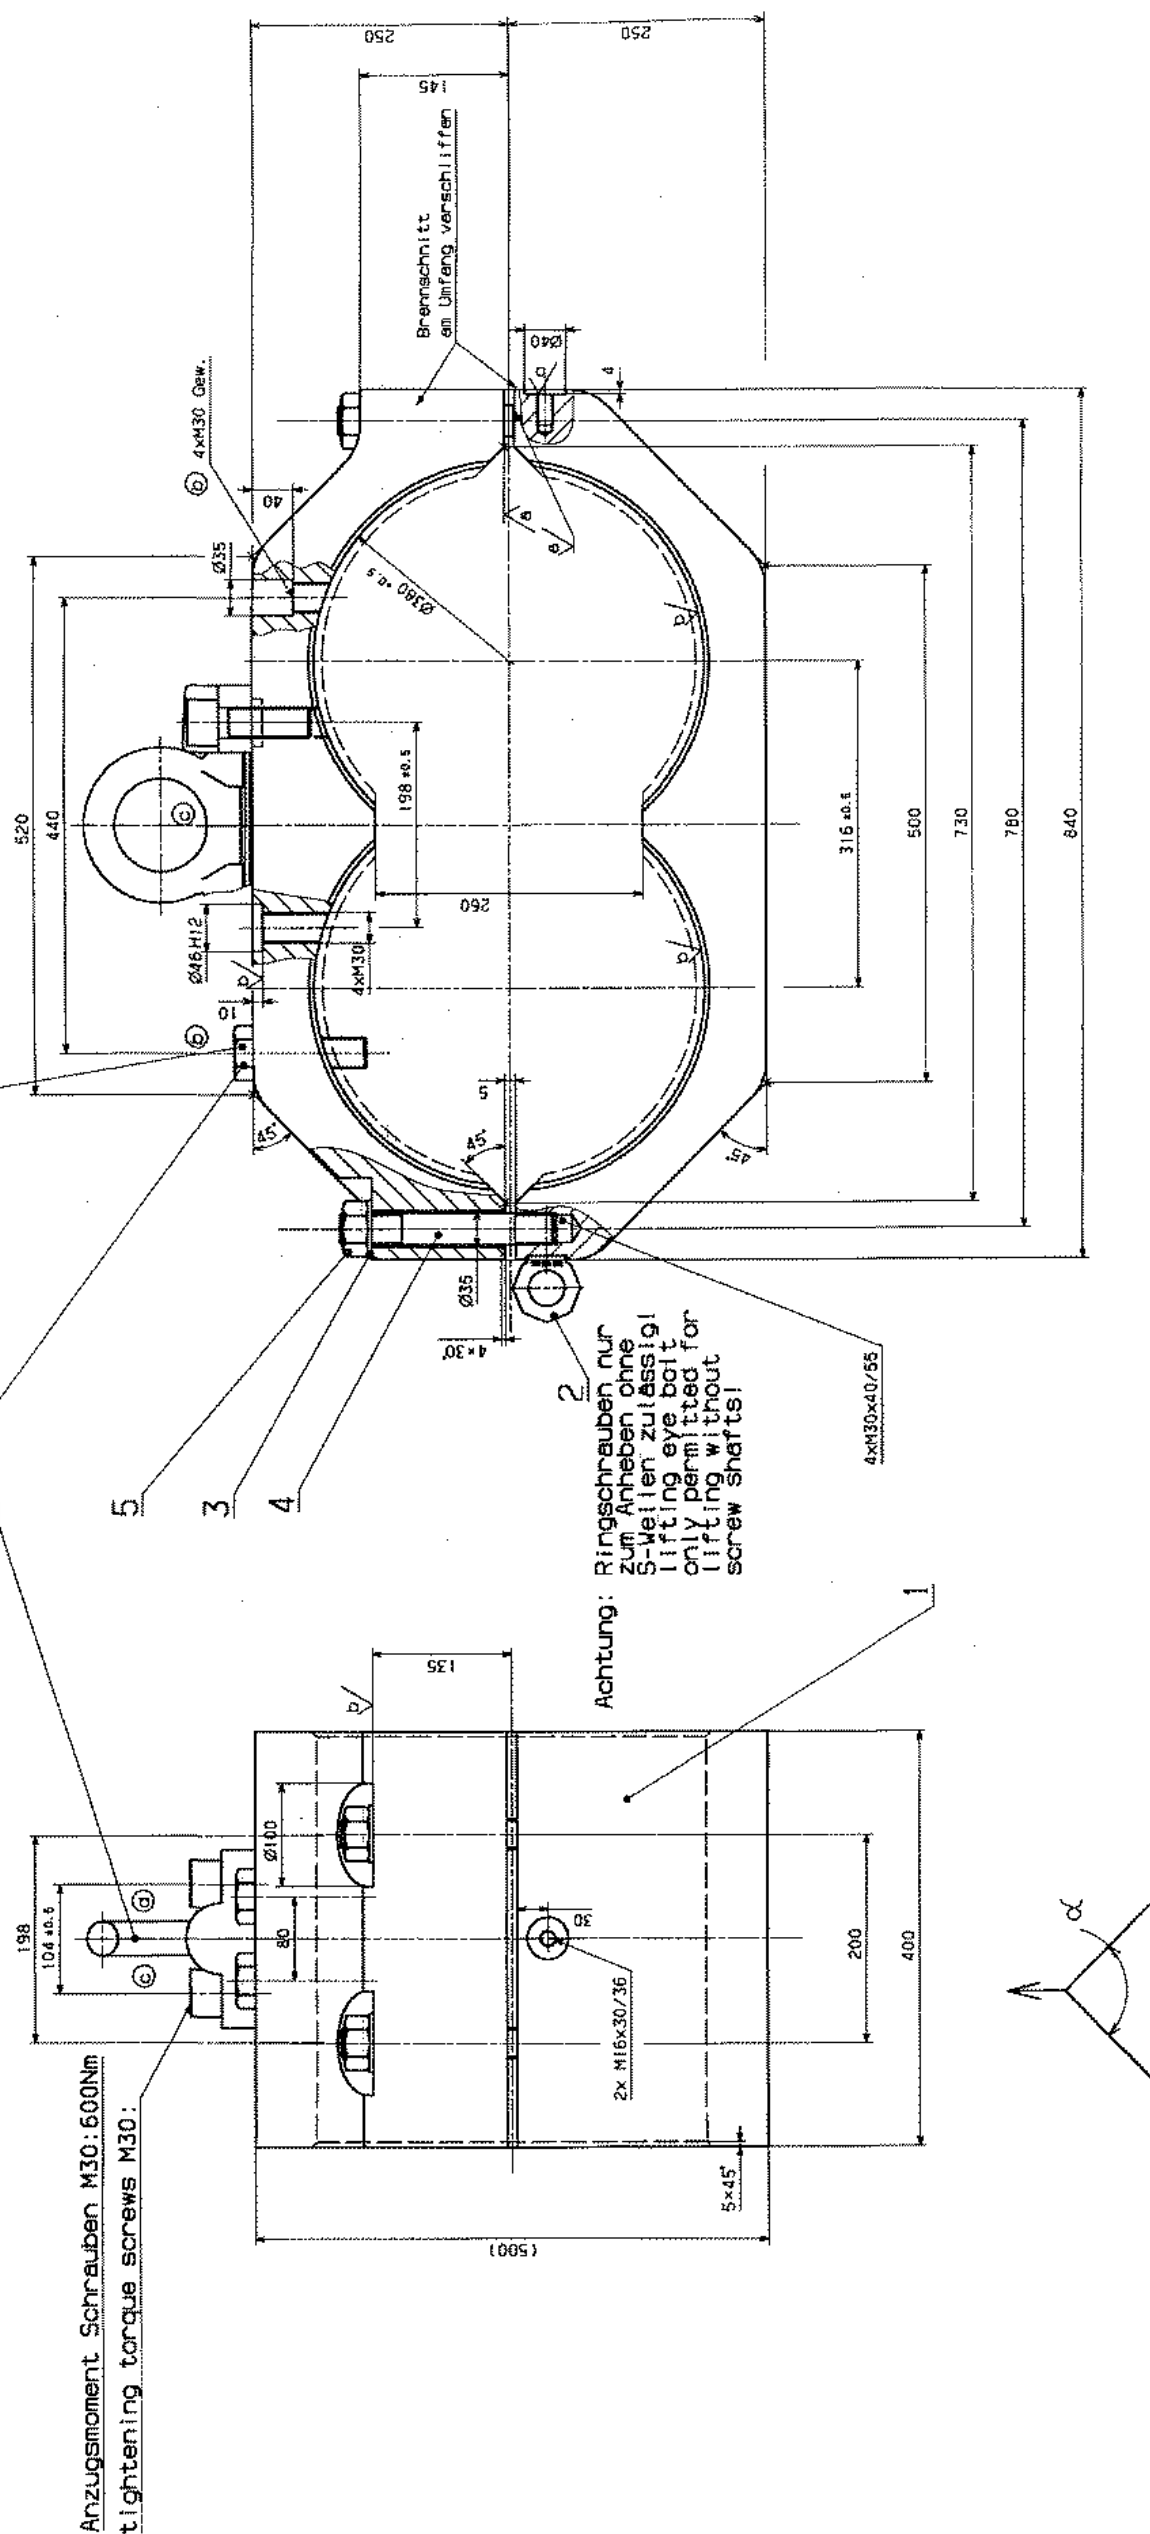


Max. Anzahl Geh. max. number of barrels	Winkel angle	α	Anzugsmoment d. 4 Muttern M30 tightening torque of 4 nuts M30	Belastung pro Seil load for each rope
12	max 90°		750 Nm	120000 N

Achtung: Winkel $\alpha > 90^\circ$ sind für diese Montagevorrichtung nicht zulässig!
Festigkeit der verwendeten Seile überprüfen!
are not permitted for this mounting devices!
strength of ropes have to be checked!


Alle Kanten gebrochen	
Alle unbemaßten Radlen R50	✓ (✓)


[illegible]

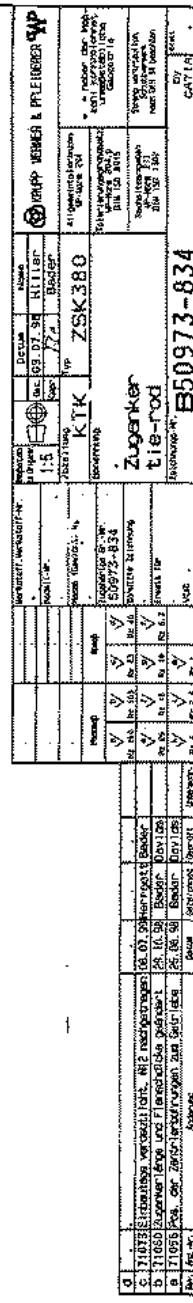



ohne Fixierbolzen
gezeichnet



[illegible]



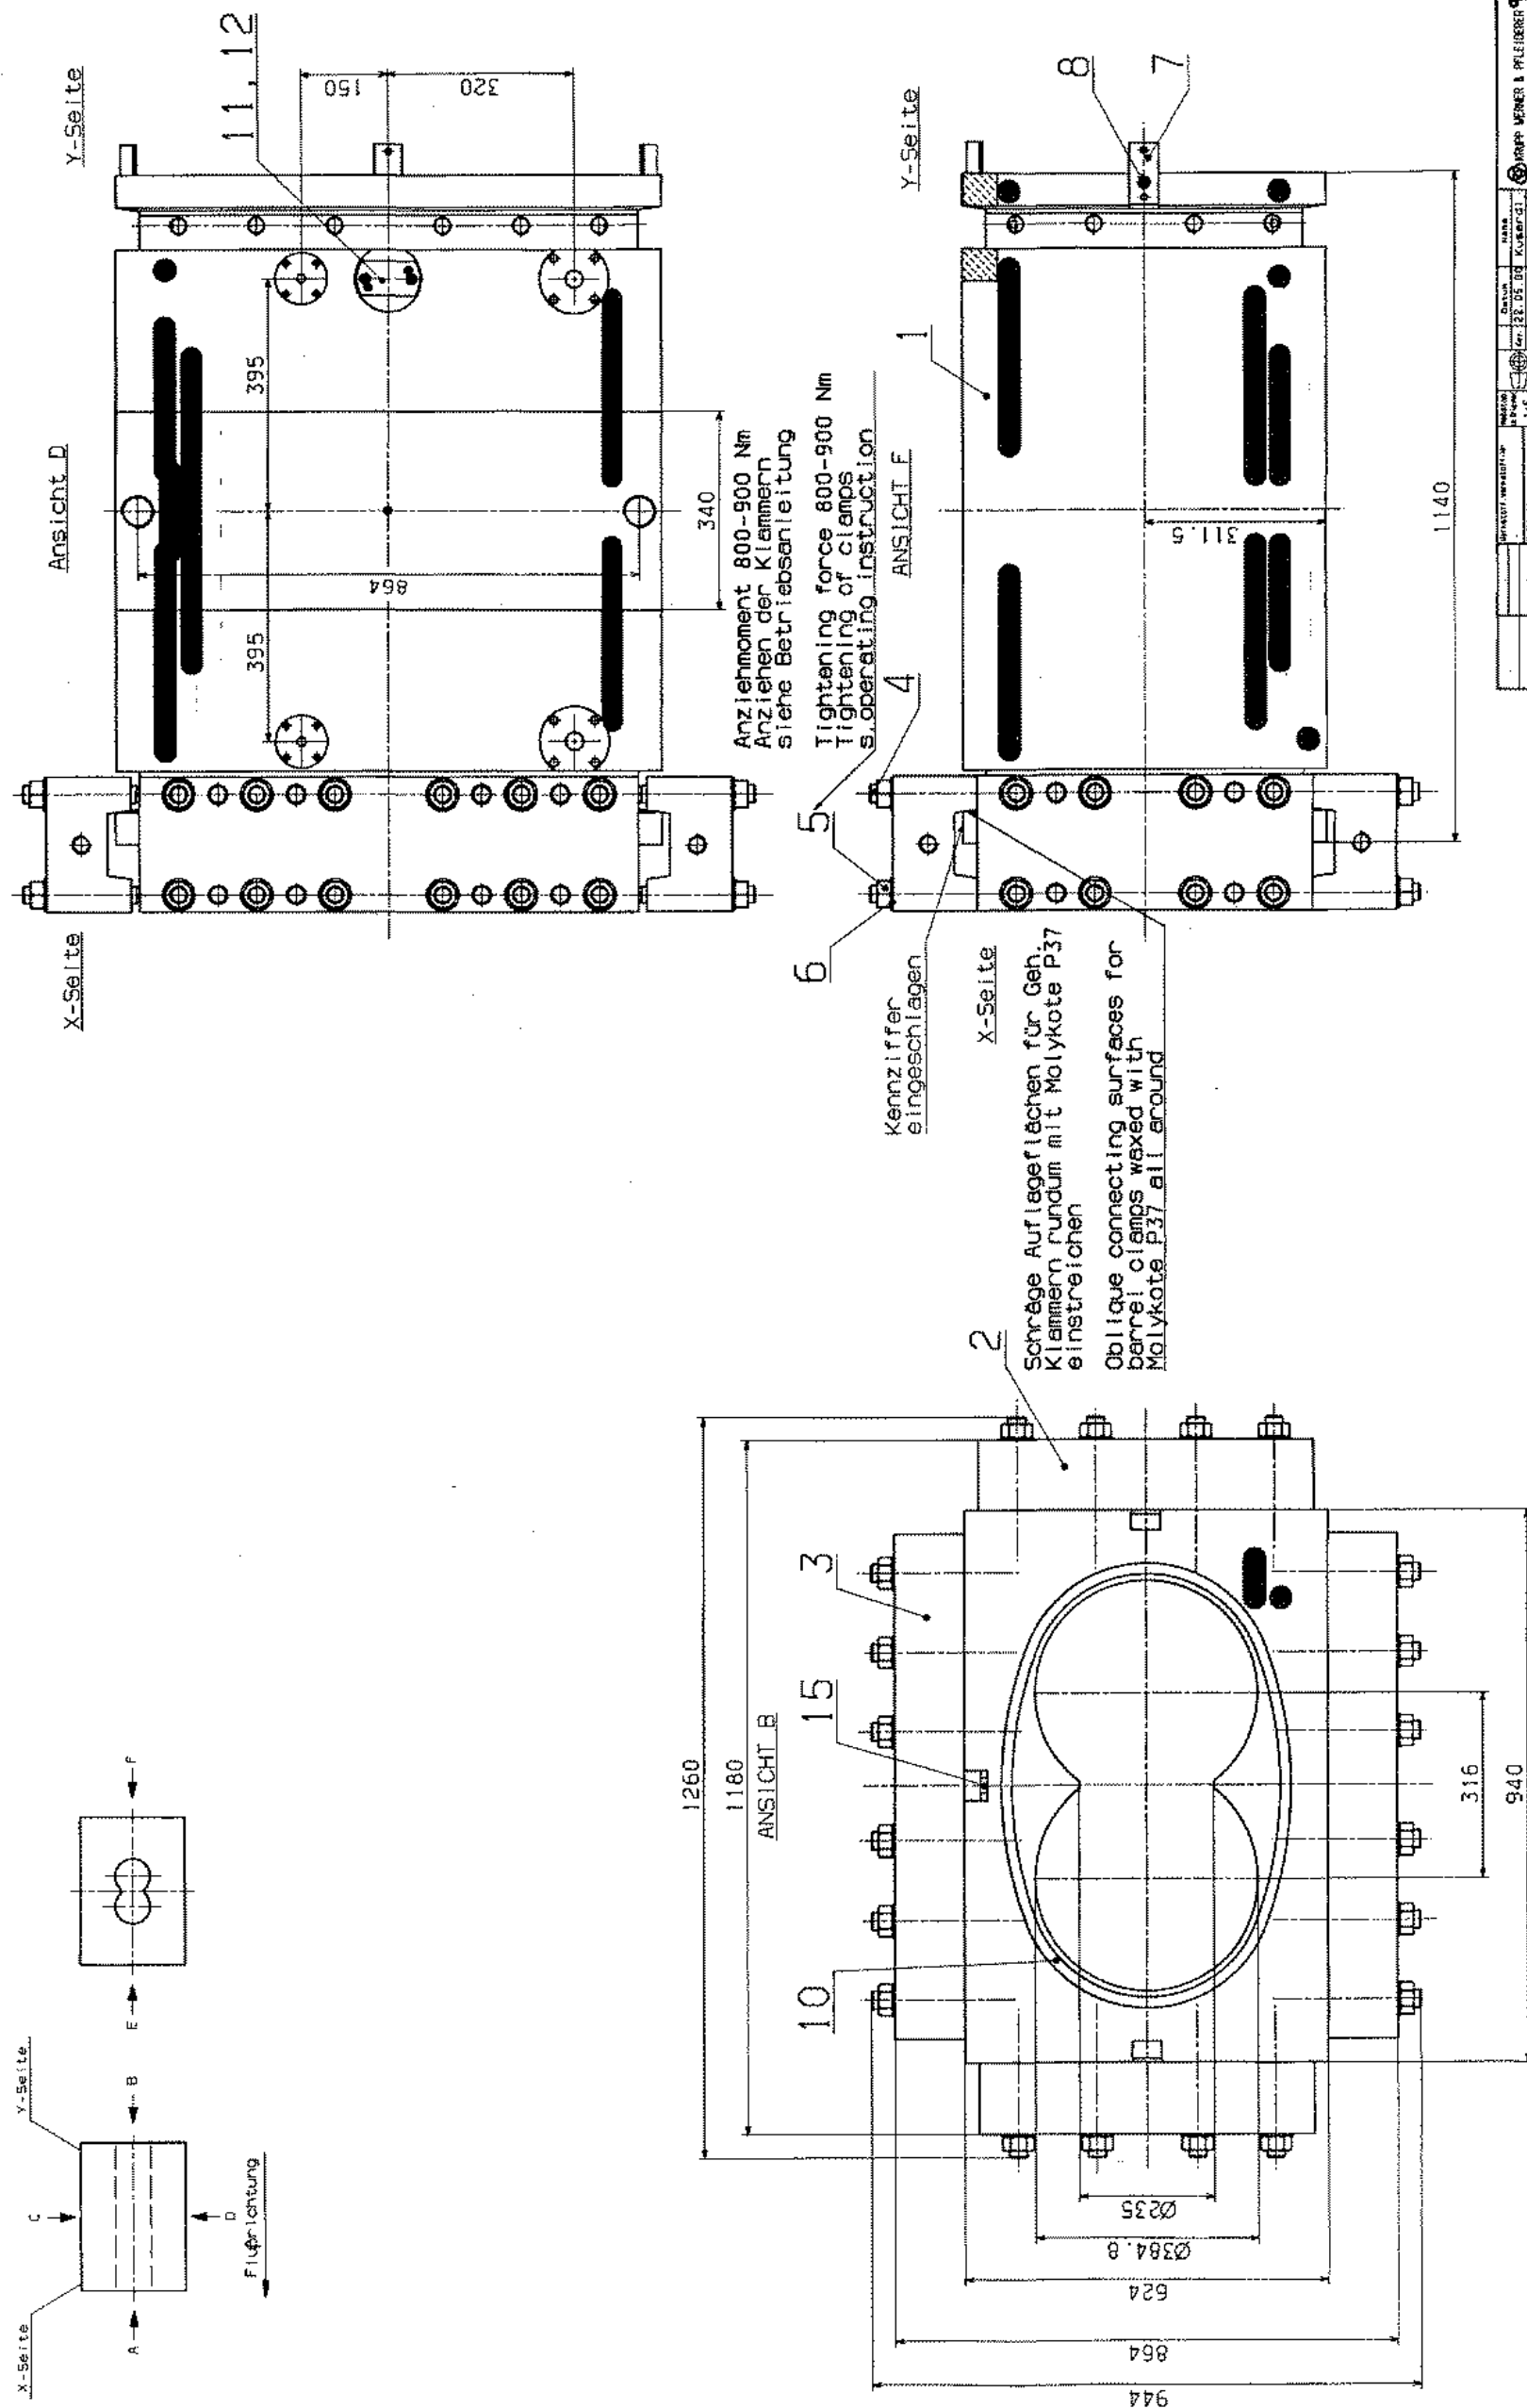[illegible]

U	V	W	X	Y	Z
1	2	3	4	5	6
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36
37	38	39	40	41	42
43	44	45	46	47	48
49	50	51	52	53	54
55	56	57	58	59	60
61	62	63	64	65	66
67	68	69	70	71	72
73	74	75	76	77	78
79	80	81	82	83	84
85	86	87	88	89	90
91	92	93	94	95	96
97	98	99	100	101	102
103	104	105	106	107	108
109	110	111	112	113	114
115	116	117	118	119	120
121	122	123	124	125	126
127	128	129	130	131	132
133	134	135	136	137	138
139	140	141	142	143	144
145	146	147	148	149	150
151	152	153	154	155	156
157	158	159	160	161	162
163	164	165	166	167	168
169	170	171	172	173	174
175	176	177	178	179	180
181	182	183	184	185	186
187	188	189	190	191	192
193	194	195	196	197	198
199	200	201	202	203	204
205	206	207	208	209	210
211	212	213	214	215	216
217	218	219	220	221	222
223	224	225	226	227	228
229	230	231	232	233	234
235	236	237	238	239	240
241	242	243	244	245	246
247	248	249	250	251	252
253	254	255	256	257	258
259	260	261	262	263	264
265	266	267	268	269	270
271	272	273	274	275	276
277	278	279	280	281	282
283	284	285	286	287	288
289	290	291	292	293	294
295	296	297	298	299	300
301	302	303	304	305	306
307	308	309	310	311	312
313	314	315	316	317	318
319	320	321	322	323	324
325	326	327	328	329	330
331	332	333	334	335	336
337	338	339	340	341	342
343	344	345	346	347	348
349	350	351	352	353	354
355	356	357	358	359	360
361	362	363	364	365	366
367	368	369	370	371	372
373	374	375	376	377	378
379	380	381	382	383	384
385	386	387	388	389	390
391	392	393	394	395	396
397	398	399	400	401	402
403	404	405	406	407	408

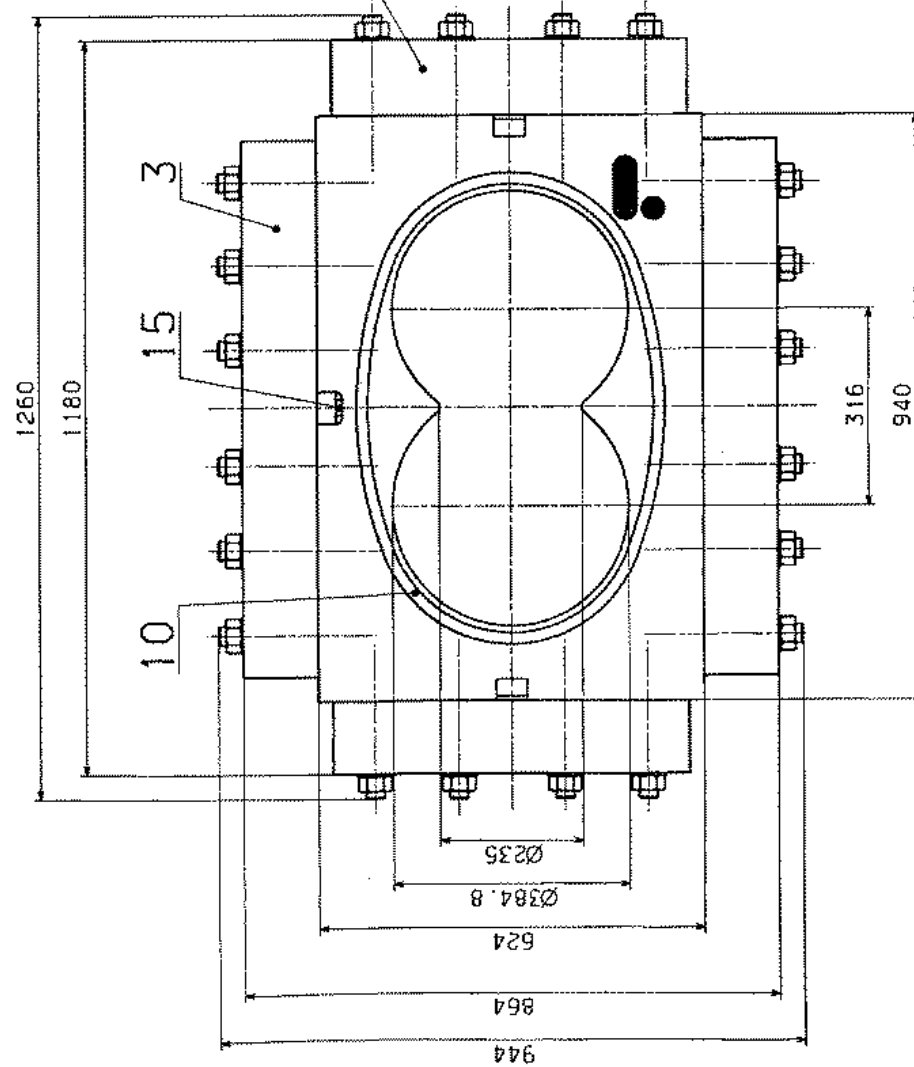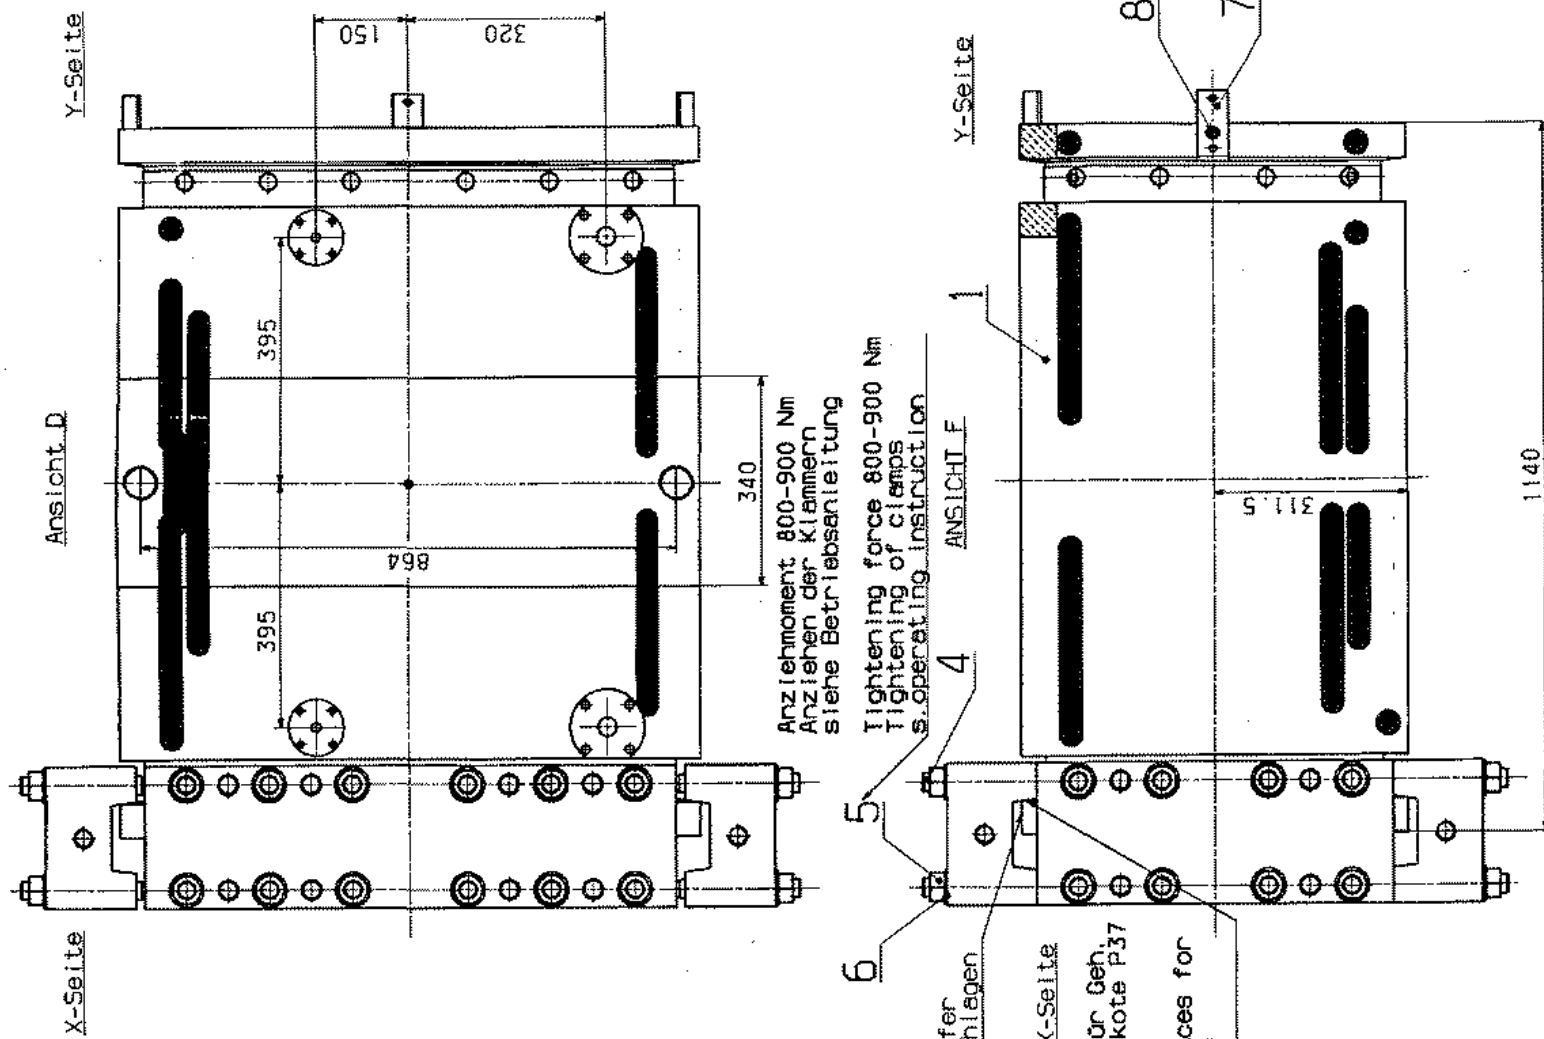[illegible]

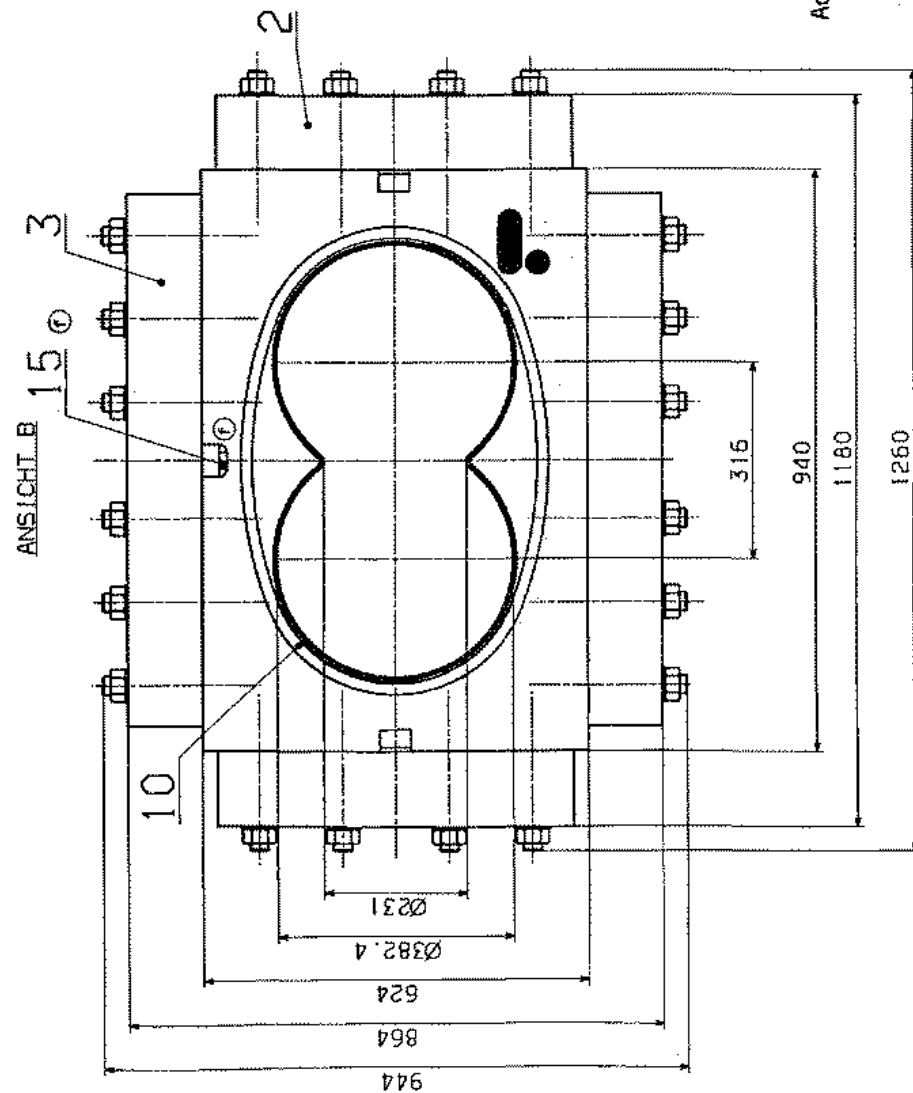[illegible]


Company	ScrewID	Mach ID	Product	S.L. (380)	B Length	Name	Date
Stahl-Christen, Phillips Company	NPC1_25233_003	ZSK380	HDPE	7980	7980	SAEMANN-HANSJ	Apr 8, 2009
Drawing No	Revision	Sheet Length	Work No	SAP Part No	Process Spec No	App/Rel	
50967-6895H1-02			E4020862080	20982797	25233		

PROPRIETARY NOTICE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF Coperton. IT IS TRANSMITTED TO YOU IN CONFIDENCE AND TRUST AND IS TO BE RETURNED UPON REQUEST. IT MAY NOT BE REPRODUCED OR ITS CONTENTS DISCLOSED IN WHOLE OR IN PART TO OTHERS OR USED FOR OTHER THAN THE PURPOSES FOR WHICH TRANSMITTED WITHOUT THE PRIOR WRITTEN PERMISSION OF Coperton. USER AGREES THAT BY ACCEPTING THIS DRAWING THEY AGREE TO COMPLY WITH THE ABOVE TERMS.

Coperton
© 2009 Stahl-Christen, Phillips Company

Coperton Exco32 Ver 3.4/Saemann-Hansj

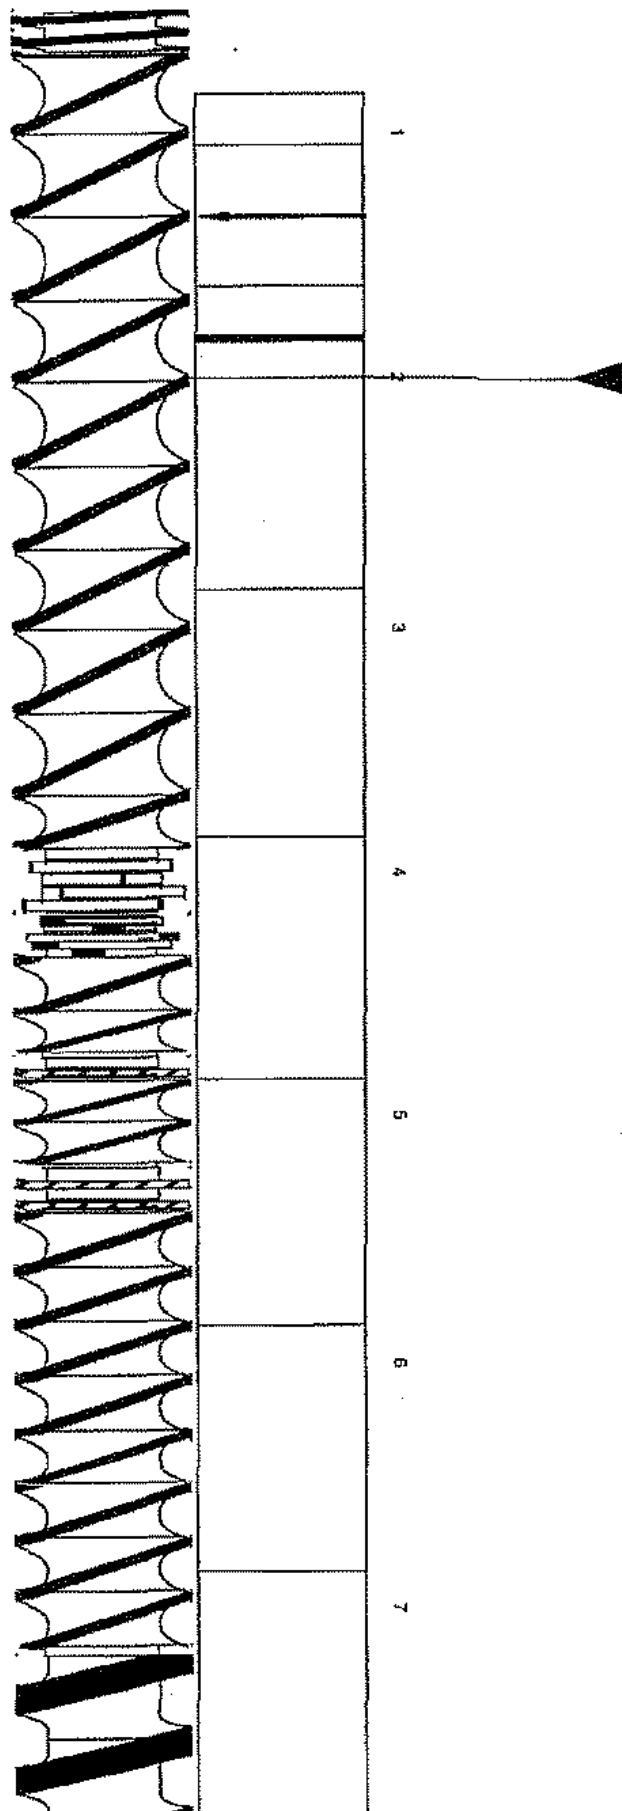

92.5/185 SF DR 377 - 8377-00.11-093/185-48 | 20609398
 SPACER/5 SF-N - 8380-43.94-453/005-48 | 20439840
 2 x 760/380 DR 377 - 8377-00.21-760/380-48 | 20429294

500/250 DR 377 - 8377-00.21-500/250-48 | 20428293
 KB45/4/300 R-3F - 8359-00.36-404/300-50 | 20416578

RING/10 - 8245-01.04-000/010-48 | 20428286
 KB5A/5/190 LH DR 374 - 8374-00.56-505/190-50 | 20445488
 500/250 DR 377 - 8377-00.21-500/250-48 | 20428293
 380/190 DR 377 - 8377-00.21-380/190-48 | 20428291
 RING/25 - 8245-00.00-001/025-48 | 20417707
 TME 22.5/90 - 8377-00.92-238/090-48 | 20439887
 RING/25 - 8245-00.00-001/025-48 | 20417707
 2 x 380/190 DR 377 - 8377-00.21-380/190-48 | 20428291
 RING/25 - 8245-00.00-001/025-48 | 20417707
 2 x TME 22.5/90 - 8377-00.92-238/090-48 | 20439887
 RING/25 - 8245-00.00-001/025-48 | 20417707
 2 x 500/250 DR 377 - 8377-00.21-500/250-48 | 20428293

RING/50 - 8245-00.00-001/050-48 | 20421235
 2 x 380/380 SF WR - 8380-98.11-380/380-48 | 20415754

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	00
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	00
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	00
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	00
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	00
1	2	3	4	5	6	7	8	9	10	11	12	13																																																																																							

[illegible]